

主轴静载  
**static load**  
2000 kg

最大载重  
**load**  
450 kg


最大速度  
**speed**  
up to 1 m/s

曳引轮  
**sheave**  
200 mm

自重  
**weight**  
85 kg

额定扭矩 <b>Nominal Torque</b>	阻转转矩 <b>Short circuited torque</b>	级数 <b>Poles</b>	编码器 <b>Encoder</b>
<b>Nm</b>	Nm		
<b>150 S5-25%ED 180s/h</b>	170	16	ERN1387 ECN1313 EI53C9.25 TS5213N2531
<b>制动器 Brake</b>			
EMFR DC110V/2.0A[2X200Nm]			

		绳槽 Ropes		
曳引轮直径 ØD	宽度 F	绳径 Ø	绳槽数 n°	槽距 Pitch
mm		mm		mm
200	57	8	3-4	12

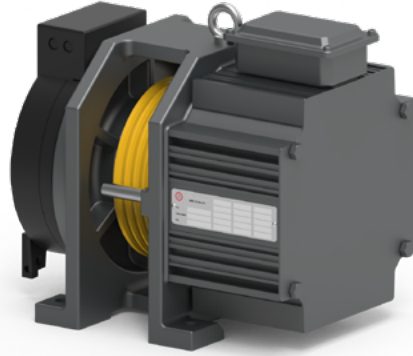

2:1	额定载重 Load		∅	绳槽 Ropes	槽距 Pitch	额定扭矩 Torque	额定功率 Power	额定转速 RPM	额定频率 Freq.	额定电流 Current 220V	额定电流 Current 380V									
	kg	m/s	mm	max	mm	Nm	kW	RPM	Hz	A	A									
260	0,3	200	3x∅8	12	71	0,43	57	7,6	4,2	2,6										
											0,4	200	3x∅8	12	71	0,57	76	10,2	4,2	2,6
320	0,3	200	3x∅8	12	87	0,52	57	7,6	5,8	3,3										
											0,4	200	3x∅8	12	87	0,70	76	10,2	5,8	3,3
											0,5	200	3x∅8	12	87	0,87	95	12,7	5,8	3,3
400	0,4	200	3x∅8	12	109	0,87	76	10,2	6,4	4,0										
											0,5	200	3x∅8	12	109	1,09	95	12,7	8,9	4,0
											1,0	200	3x∅8	12	109	2,18	191	25,5	13,3	6,9
450	1,0	200	4x∅8	12	143	2,86	191	25,5	17,4	9,0										

1 - 数据如有更改，恕不另行通知

1 - Data are subject to change without prior notice

2 - 我们能够提供带电源线和不带电源线两种配置的机器

2 - We are able to offer machines with and without power cable configurations.

